

Integrity Engineering

Corporate Address : B-67 Surabhi Park, Vastral Road, Ahmedabad, Gujarat India


Contact No: +91 7990998647,8155823196

Email id: nomad24625@gmail.com



Bag Filter System

Designer-Manufacturer-Exporter-Supplier

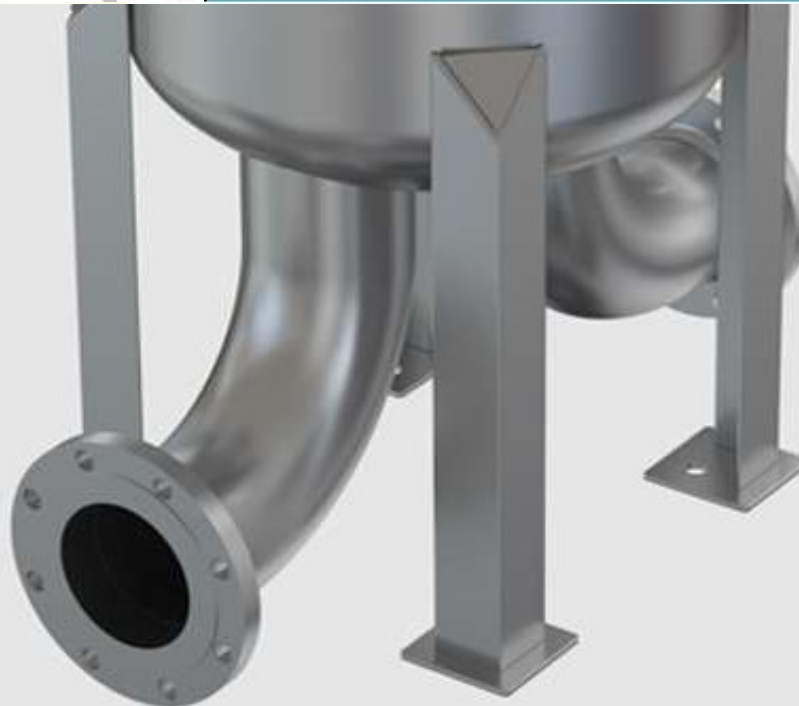



Bag Filter System

Bag filter system is designed for optimum filtration performance. Its range provides filtration solution for a broad variety of fluid applications in the process industry. They are particularly useful for filtering large volumes of high viscosity liquids. Bag filter is constructed of filter housing, filter bags, internal cage to support bags, positive sealing arrangement, & choice of end connections. The internal support ensures bags will not burst as high differential pressures build up during operation.

Operation

Unfiltered fluid enters the housing and is distributed evenly around the filter bags. Filtration takes place from inside to outside. Solids are collected on the inside of filter bag for easy removal. The filtered fluid then exits through the outlet pipe.

Features & Benefits

- High flow rates
- Low pressure drop
- High dirt holding capacity
- Positive sealing arrangement to avoid bypassing
- Suitable for PPCollar, Rigid Ring & Snap Band Bags
- Quick opening Tri Clovers & Fly nut design
- Easy to operate & low maintenance
- Low downtime
- Flow rate up to 2000 m³/hr & More
- Customized design available
- Large-area, heavy-duty baskets
- Housings are permanently piped
- Covers are O'-Ring sealed
- All housings made from SS 316 L, SS 316 & SS 304 are mirror polished to resist adhesion of dirt and scale
- Carbon steel housings are sand blasted, epoxy coated & finally painted with two coats of synthetic enamel
- ASME code stamp & PED certification available
- Multiple bag filter / Duplex bag filter / Jacketed bag filter unit designs are available
- High temperature & High pressure design are available
- Special options include filter bag hold-down devices, sanitary, Possibilities of different outlet connections, higher pressure ratings, extra-length legs, heat jacketing and adapters for holding filter bags & Magnets design bag filter.

Material Of Construction

- SS 316 L, SS 316, SS 304
- Super Duplex, Duplex Stainless steel
- CARBON STEEL (ALL GRADE)
- MILD STEEL, ALLOY METALS
- POLYPROPYLENE
- LEAD LINING on Any Metal
- RUBBER LINING on Any Metal
- PTFE LINING on Any Metal

Technical Specifications

Size

Bag filter system suitable for

- 4" x 10" Long Filter Bag
- 4" x 17" Long Filter Bag
- 7" x 17" Long Filter Bag
- 7" x 32" Long Filter Bag

Applications

- | | | | |
|---|---|--|---|
| <ul style="list-style-type: none">• Processing Chemicals• Paints• Petroleum Derivatives | <ul style="list-style-type: none">• Automobiles• Coolants• Resins | <ul style="list-style-type: none">• Cutting Oils• Varnishes• Cleaning Fluids | <ul style="list-style-type: none">• Lacquers• Vegetable Oils• Pharmaceuticals |
|---|---|--|---|

Multiple bag filter system suitable for

- 2 Nos. Of 7" x 32" Long Filter Bag
- 3 Nos. Of 7" x 32" Long Filter Bag
- 4 Nos. Of 7" x 32" Long Filter Bag
- 5 Nos. Of 7" x 32" Long Filter Bag
- 6 Nos. Of 7" x 32" Long Filter Bag
- 7 Nos. Of 7" x 32" Long Filter Bag
- 8 Nos. Of 7" x 32" Long Filter Bag
- 9 Nos. Of 7" x 32" Long Filter Bag

Flow Rate: Capacity: Up to 2000 m³/hr

Bag filter suitable for Bag Configuration


- PPCollar Bag
- Rubber Collar Bag
- Snap Band Bag
- Rigid Ring Bag
- Flange Collar Bag

Gasket/O Ring Material


- Neoprene, Nitrile, Silicone, Viton, Buna N, EPDM, PTFE

End connections available

- NPT/ BSPT Threaded
- Flanged Table E/ Table F
- ANSI B 16.5 Flanged
- DIN Standard
- TriClover Adaptors
- SMS/Dairy End Connection

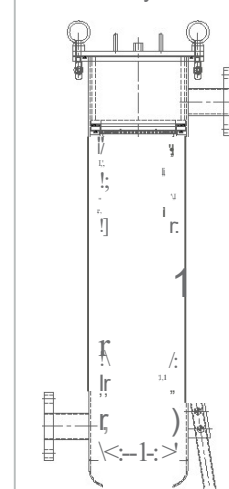

Single Bag Filter

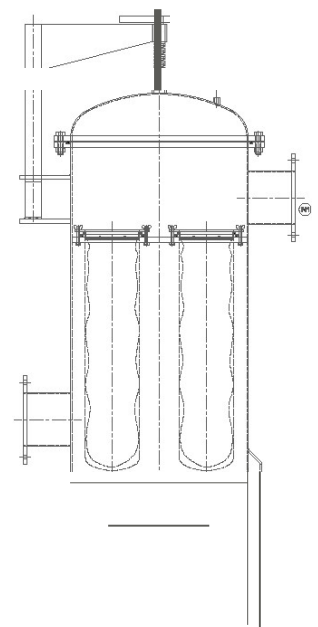

Multiple Bag Filter